

## PRODUCT DATA SHEET

---

Part number 519402

---

EAN 4015609161669

Manufacturer WALTHER-WERKE

WEEE-Reg.-Number: DE 22131895

---

### Product description

---

Waterproof panel socket angled 16A 4P 2h with flange 100x92mm



Similar image

### Detailed product description

---

WALTHER Panel socket 16A 4P 50-500V 300-500Hz 2h IP67  
 angled  
 made from PA6 material  
 soft transition  
 radius from flange to collar  
 flange 100x92  
 fixing center 85x77





### Ordering Information

---

|                         |          |
|-------------------------|----------|
| Order unit              | Piece    |
| Customs number          | 85366990 |
| Net weight              | 0,257 kg |
| Packing quantity (VPE)  | 10       |
| Length of the packaging | 0,31 m   |
| Width of the packaging  | 0,255 m  |
| Depth of the packaging  | 0,15 m   |
| Gross weight(VPE)       | 2,766 kg |

### Certificates

---

|                   |                       |   |
|-------------------|-----------------------|---|
| VDE certification | 123017                |  |
| UL certification  | No. E83342            |  |
| UL certification  | No. E188992           |  |
| EAC certification | BY112.02.01.020 06089 |  |

## Classification system

---

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC001317 |


## Technical product data

---

|                                       |                              |
|---------------------------------------|------------------------------|
| IEC-amperage                          | 16 A                         |
| Amperage acc. UL/CSA (for UL-version) | 20 A                         |
| Number of poles                       | 4                            |
| Voltage acc. EN 60309-2               | 50-500 V (>300-500 Hz) green |
| Clock hour position                   | 2 h                          |
| Identification colour                 | Green                        |
| RAL-number                            | 6025                         |
| Degree of protection (IP)             | IP67                         |
| Connection system                     | Screwed terminal             |
| Angle of plug                         | Angled                       |
| Material                              | Plastic                      |
| Military model                        | False                        |
| Flange size vertical                  | 100 mm                       |
| Drill hole distance vertical          | 85 mm                        |
| Flange size horizontal                | 92 mm                        |
| Drill hole distance horizontal        | 77 mm                        |

## Dimension sheet

---

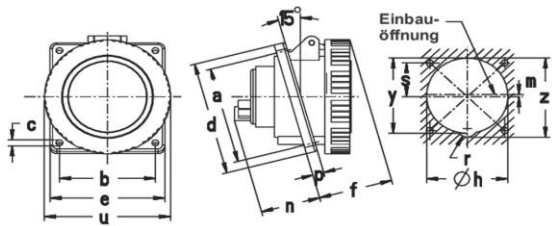

| Amp. | 16  |      |      | 32  |      |      | 63  |      |      |
|------|-----|------|------|-----|------|------|-----|------|------|
| Pole | 3   | 4    | 5    | 3   | 4    | 5    | 3   | 4    | 5    |
| a    | 47  | 85   | 85   | 85  | 85   | 85   | 85  | 85   | 85   |
| b    | 47  | 77   | 77   | 77  | 77   | 77   | 77  | 77   | 77   |
| c    | 5,5 | 5,5  | 5,5  | 5,5 | 5,5  | 5,5  | 6,5 | 6,5  | 6,5  |
| d    | 68  | 100  | 100  | 100 | 100  | 100  | 107 | 107  | 107  |
| e    | 62  | 92   | 92   | 92  | 92   | 92   | 100 | 100  | 100  |
| f    | 49  | 52   | 52   | 56  | 56   | 60   | 82  | 82   | 82   |
| h    | 51  | 73   | 70   | 73  | 73   | 78   | 81  | 81   | 84   |
| m    | -/- | 2    | 2    | -/- | 2,5  | 2,5  | -/- | 2,5  | 3    |
| n    | 41  | 38   | 38   | 47  | 47   | 47   | 64  | 64   | 64   |
| p    | 6   | 9    | 9    | 9   | 9    | 9    | 12  | 12   | 12   |
| r    | 6,5 | 7,5  | 7,5  | 7,5 | 7,5  | 8,5  | 8   | 8    | 9    |
| s    | -/- | 42,5 | 42,5 | -/- | 42,5 | 42,5 | -/- | 42,5 | 42,5 |
| u    | 72  | 81   | 88   | 96  | 96   | 103  | 110 | 110  | 110  |
| y    | 53  | 76   | -/-  | 76  | 76   | -/-  | 85  | 85   | -/-  |
| z    | 57  | 82   | 74   | 82  | 82   | 85   | 90  | 90   | 90   |