

## PRODUCT DATA SHEET

---

Part number 530404

EAN 4015609021628

Manufacturer WALTHER-WERKE

WEEE-Reg.-Number: DE 22131895

### Product description

---

Panel socket angled 32A 4P 4h with flange  
 90x75mm



Product image

### Detailed product description

---

WALTHER Panel socket 32A 4P 110V 4h IP44  
 angled  
 made from PA6 material  
 finger-safe in accordance with BGV A3  
 soft transition  
 radius from flange to collar  
 flange 90x75  
 fixing center 60x60




### Ordering Information

---

|                         |          |
|-------------------------|----------|
| Order unit              | Piece    |
| Customs number          | 85366990 |
| Net weight              | 0,216 kg |
| Packing quantity (VPE)  | 10       |
| Length of the packaging | 0,31 m   |
| Width of the packaging  | 0,195 m  |
| Depth of the packaging  | 0,14 m   |
| Gross weight(VPE)       | 2,308 kg |

### Certificates

---

|                   |                       |   |
|-------------------|-----------------------|---|
| VDE certification | 123021                |  |
| UL certification  | No. E83342            |  |
| EAC certification | BY112.02.01.020 06089 |  |


## Classification system

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC001317 |

## Technical product data

|                                       |                         |
|---------------------------------------|-------------------------|
| IEC-amperage                          | 32 A                    |
| Amperage acc. UL/CSA (for UL-version) | 30 A                    |
| Number of poles                       | 4                       |
| Voltage acc. EN 60309-2               | 110 V (50+60 Hz) yellow |
| Clock hour position                   | 4 h                     |
| Identification colour                 | Yellow                  |
| RAL-number                            | 1018                    |
| Degree of protection (IP)             | IP44                    |
| Connection system                     | Screwed terminal        |
| Angle of plug                         | Angled                  |
| Material                              | Plastic                 |
| Military model                        | False                   |
| Flange size vertical                  | 90 mm                   |
| Drill hole distance vertical          | 60 mm                   |
| Flange size horizontal                | 75 mm                   |
| Drill hole distance horizontal        | 60 mm                   |

## Dimension sheet

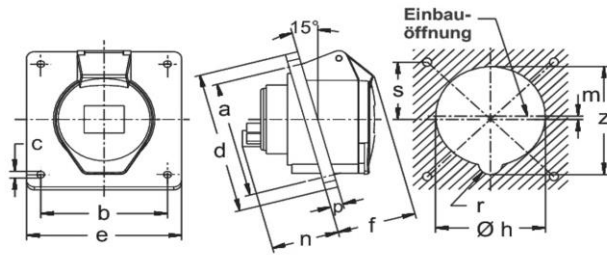

| Amp. | 16   |     |     | 32  |     |     |
|------|------|-----|-----|-----|-----|-----|
|      | 3    | 4   | 5   | 3   | 4   | 5   |
| Pole | 3    | 4   | 5   | 3   | 4   | 5   |
| a    | 47   | 60  | 60  | 60  | 60  | 70  |
| b    | 47   | 60  | 60  | 60  | 60  | 60  |
| c    | 5,5  | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 |
| d    | 68   | 75  | 85  | 90  | 90  | 95  |
| e    | 62   | 75  | 75  | 75  | 75  | 80  |
| f    | 45   | 51  | 51  | 52  | 52  | 56  |
| h    | 51   | 60  | 68  | 67  | 67  | 76  |
| m    | -/-  | 2   | 2   | -/- | -/- | 2,5 |
| n    | 41   | 38  | 38  | 47  | 47  | 47  |
| p    | 6    | 9   | 9   | 9   | 9   | 9   |
| r    | 6,5  | 7,5 | 8   | 7,5 | 7,5 | 8,5 |
| s    | -/-  | -/- | 30  | -/- | -/- | 35  |
| y    | 52,5 | 62  | -/- | 71  | 71  | -/- |
| z    | 57   | 64  | 73  | 76  | 76  | 83  |