

## PRODUKTDATENBLATT

Artikelnummer	AJ110309
EAN	4015609276318
Hersteller	WALTHER-WERKE

### Artikelbeschreibung

Wandsteckdose 16A 3P 9h mit 2-poligem  
Ausschalter und mechanische Verriegelung



Abbildung ähnlich



### Ausführliche Artikelbeschreibung

WALTHER Wandsteckdose 16A 3P 400V 9h IP44  
aus PA6-Material  
mit Schalter  
und Verriegelung  
Ausschalter = 2-polig

### Bestellinformationen

Bestelleinheit	Stück
Zolltarifnummer	85366990
Verpackungsmenge	1
Gewicht pro Stück	1,74 kg


### Zertifikate

VDE certification	40002737	
UL certification	No. E188992	

## Technische Produktdaten

IEC-Stromstärke	16 A
UL/CSA-Stromstärke (wenn UL-Ausführung gewünscht)	20 A
Polzahl	3
Spannung nach EN 60309-2	400 V (50+60 Hz) rot
Uhrzeit-Stellung	9 h
Kennfarbe	rot
Schutzart (IP)	IP44
Schalter	mechanische Verriegelung
Ausführung des Schalters	Sonderschalter
Werkstoff des Gehäuses	Kunststoff

## Maßblatt

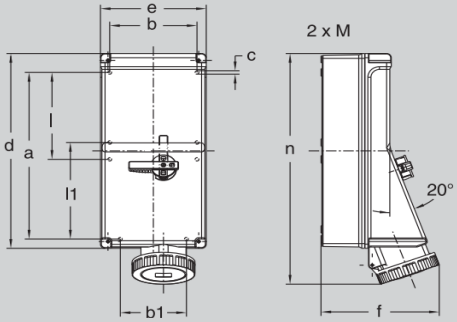

The drawing shows a front view on the left and a side view on the right. The front view includes dimensions: 'a' (total height), 'd' (height to the top of the handle), 'l' (height to the top of the body), 'l1' (height to the bottom of the handle), 'e' (width of the top handle area), 'b' (width of the main body), 'c' (width of the top handle area), and 'b1' (width of the base). The side view shows dimensions: 'n' (total height), 'f' (width of the base), and a 20-degree angle on the side panel. Two mounting holes are labeled '2 x M'.

Amp.	16			32			63		
	3	4	5	3	4	5	3	4	5
a	316	316	316	316	316	316	316	316	316
b	151	151	151	151	151	151	151	151	151
b1	114	114	114	114	114	114	114	114	114
c	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5
d	370	370	370	370	370	370	370	370	370
e	183	183	183	183	183	183	183	183	183
f (IP44)	182	187	184	187	187	189	196	196	196
f (IP67)	193	194	196	201	201	201	209	209	209
l	165	165	165	165	165	165	165	165	165
ll	183	183	183	183	183	183	183	183	183
n (IP44)	401	404	405	415	415	417	432	432	432
n (IP67)	404	405	410	418	418	418	443	443	443
M	25/40	25/40	25/40	25/40	25/40	25/40	25/40	25/40	25/40